
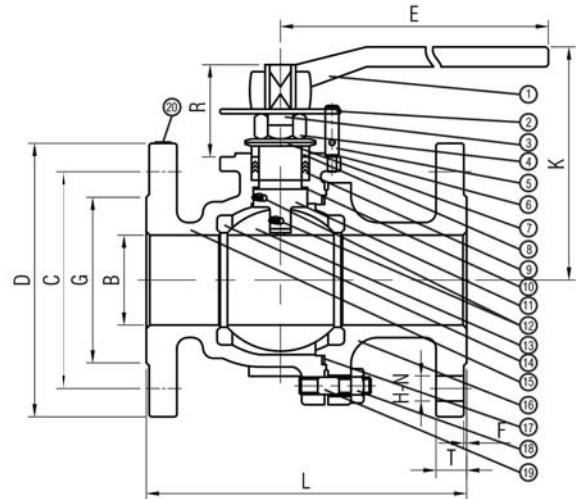



## F-150-SS-F-N

### 3.9

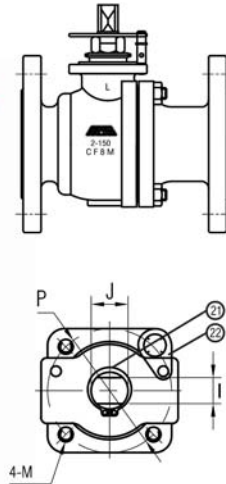

- Full port, Two piece body
- ANSI B16.34 Class 150
- Blowout-proof stem
- ISO 5211 Mounting pad
- Floating Ball, Anti-static device
- Fire-safe design
- Complies with NACE MR-0103 & Supplier Requirements of NACE MR-0175/ISO 15156

#### PRESSURE TEMPERATURE RATING

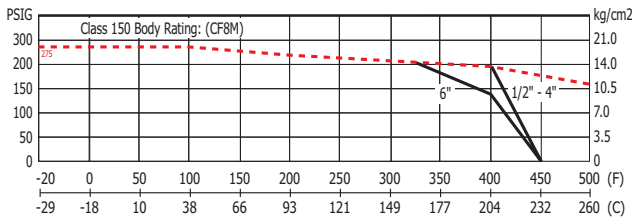

NAME / MATERIAL				
NO.	PART NAME	MATERIAL	FS*	QTY
1	HANDLE	DUCTILE IRON		1
2	STOPPER PFATE	A276 TYPE 304		1
3	LOCK WASHER	A276 TYPE 304		1
4	GLAND NUT	A276 TYPE 304		1
5	STOPPER PIN	A276 TYPE 304		1
6	LOCK WASHER	A276 TYPE 304		1
7	BELLEVILLE WASHER	S.S. 301		2
8	GLAND	A276 TYPE 304		1
9	PACKING	PTFE	GRAPHITE	1 SET
10	THRUST WASHER	RPTFE 15% GFT		1
11	STEM	A276 TYPE 316		1
12	ANTI-STATIC DEVICE	A276 TYPE 304		2 SETS
13	BALL	A351 CF8M		1
14	SEAT	PTFE (TFM-1600)		2
15	BODY	A351 CF8M		1
16	CAP	A351 CF8M		1
17	BODY SEAL	PTFE	GRAPHITE	1
18	BOLT NUT	A194 GRADE 8MA		1 SET
19	STUD BOLT	A193 GRADE B8M		1 SET
20	IDENTIFICATION PLATE	A276 TYPE 304		1
21	RETAINING RING	CARBON STEEL		1
22	LOCK PLATE	A276 TYPE 304		1

\*Fire Safe Certified to API-607

DIMENSIONS																		
SIZE	mm/in B	mm/in C	mm/in D	mm/in E	mm/in F	mm/in G	mm/in H	mm/in I	mm/in J	mm/in K	mm/in L	in M	mm/in N	mm/in P	mm/in T	mm/in R	ISO FLG	WEIGHT KGS/LBS
1/2"	15	60.5	89	130	1.6	35	16	8	11	83	108	1/4-UNC	4	36	11.2	27	F03	1.64
	0.59	2.38	3.50	5.12	0.06	1.38	0.62	0.31	0.43	3.27	4.25			1.42	0.44	1.06		3.60
3/4"	19	70	98.5	130	1.6	43	16	8	11	86	117	1/4-UNC	4	36	11.2	27	F03	2.00
	0.75	2.75	3.88	5.12	0.06	1.69	0.62	0.31	0.43	3.39	4.62			1.42	0.44	1.06		4.40
1"	24	79	108	160	1.6	51	16	10	14	104	127	1/4-UNC	4	50	11.2	35.5	F05	3.15
	0.95	3.12	4.25	6.30	0.06	2.00	0.62	0.39	0.55	4.09	5.00			1.97	0.44	1.40		6.93
1 1/2"	38	98.5	127	230	1.6	73	16	14	20	125	165	5/16-UNC	4	70	14.3	49	F07	6.26
	1.50	3.88	5.00	9.06	0.06	2.88	0.62	0.55	0.79	4.92	6.50			2.76	0.56	19.3		13.77
2"	50	120.5	152	230	1.6	92	19	14	20	134.5	178	5/16-UNC	4	70	15.9	49	F07	9.30
	1.97	4.75	5.98	9.06	0.06	3.62	0.75	0.55	0.79	5.30	7.00			2.76	0.63	1.93		20.46
2 1/2"	65	139.7	178	400	1.6	104.6	19	17	25	170.5	190.5	3/8-UNC	4	102	17.5	61	F10	16.82
	2.56	5.50	7.00	15.75	0.06	4.12	0.75	0.67	0.98	6.71	7.50			4.02	0.69	2.40		37.00
3"	76	152.5	190	400	1.6	127	19	17	25	181.5	203	3/8-UNC	4	102	19.1	61	F10	22.00
	3.00	6.00	7.48	15.75	0.06	5.00	0.75	0.67	0.98	7.15	8.00			4.02	0.75	2.40		48.40
4"	100	190.5	229	460	1.6	157	19	23	34	205.5	229	1/2-UNC	8	125	23.9	73	F12	37.00
	3.94	7.50	9.02	18.11	0.06	6.18	0.75	0.91	1.34	8.09	9.02			4.92	0.94	2.87		81.40
6"	150	241.5	279	1000	1.6	216	22	27	40	289.5	394	5/8-UNC	8	140	25.4	90	F14	85.30
	5.91	9.50	10.98	39.37	0.06	8.50	0.88	1.06	1.57	11.40	15.51			5.51	1.00	3.54		187.66