


## F-150-SS-R-N


### 3.8

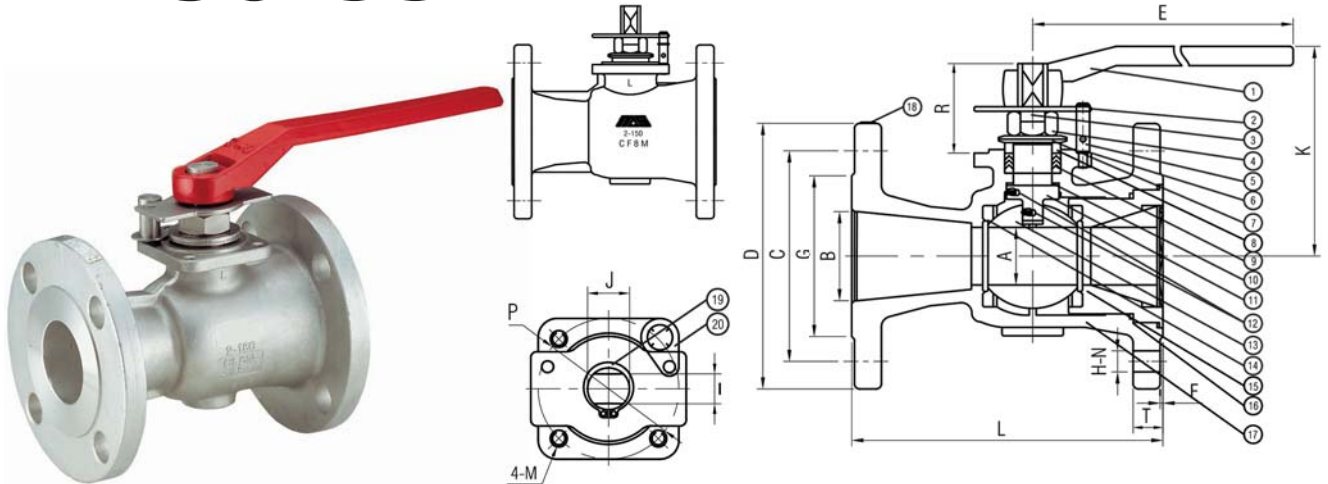

- Reduced port, One piece body
- ANSI B16.34 Class 150
- Blowout-proof stem
- ISO 5211 Mounting pad
- Floating Ball, Anti-static device
- Fire-safe design
- Complies with NACE MR-0103 & Supplier Requirements of NACE MR-0175/ISO 15156

NAME / MATERIAL				
NO.	PART NAME	MATERIAL	FS*	QTY
1	HANDLE	DUCTILE IRON		1
2	STOPPER PLATE	A276 TYPE 304		1
3	LOCK WASHER	A276 TYPE 304		1
4	GLAND NUT	A276 TYPE 304		1
5	STOPPER PIN	A276 TYPE 304		1
6	LOCK WASHER	A276 TYPE 304		1
7	BELLEVILLE WASHER	S.S.301		2
8	GLAND	A276 TYPE 304		1
9	PACKING	PTFE	GRAPHITE	1 SET
10	THRUST WASHER	RPTFE 15% GFT		1
11	STEM	A276 TYPE 316		1
12	ANTI-STATIC DEVICE	A276 TYPE 304		2 SETS
13	BALL	A351 CF8M		1
14	SEAT	PTFE (TFM-1600)		2
15	BODY INSERT	A351 CF8M		1
16	BODY SEAL	PTFE	GRAPHITE	1
17	BODY	A351 CF8M		1
18	IDENTIFICATION PLATE	A276 TYPE 304		1
19	RETAINING RING	CARBON STEEL		1
20	LOCK PLATE	A276 TYPE 304		1

### PRESSURE TEMPERATURE RATING

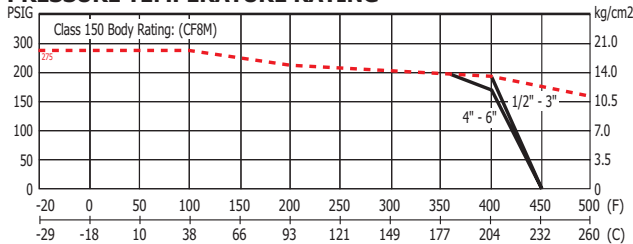

\*Fire Safe Certified to API-607

DIMENSIONS																			
SIZE	mm/in A	mm/in B	mm/in C	mm/in D	mm/in E	mm/in F	mm/in G	mm/in H	mm/in I	mm/in J	mm/in K	mm/in L	in M	mm/in N	mm/in P	mm/in R	ISO FLG	WEIGHT KGS/LBS	
2"	38	50	120.5	152	230	1.6	92	19	14	20	125	178	5/16-UNC	4	70	15.9	49	F07	8.00
	1.50	1.97	4.75	5.98	9.06	0.06	3.62	0.75	0.55	0.79	4.92	7.00			2.76	0.63	1.93		17.60
3"	58	76	152.5	190	400	1.6	127	19	17	25	168	203	3/8-UNC	4	70	19.1	59	F07	15.70
	2.28	3.00	6.00	7.48	15.75	0.06	5.00	0.75	0.67	0.98	6.61	8.00			2.76	0.75	2.32		34.54
4"	76	102	190.5	229	400	1.6	157	19	17	25	183	229	3/8-UNC	8	70	23.9	59	F07	24.60
	3.00	4.02	7.50	9.02	15.75	0.06	6.18	0.75	0.67	0.98	7.20	9.02			2.76	0.94	2.32		54.12
6"	114	152	241.5	279	750	1.6	216	22	23	34	245	267	1/2-UNC	8	125	25.4	73	F12	49.50
	4.49	5.98	9.50	10.98	29.53	0.06	8.50	0.88	0.91	1.34	9.65	10.51			4.92	1.00	2.87		108.90