


F-300-CS-R-SS-N


3.4

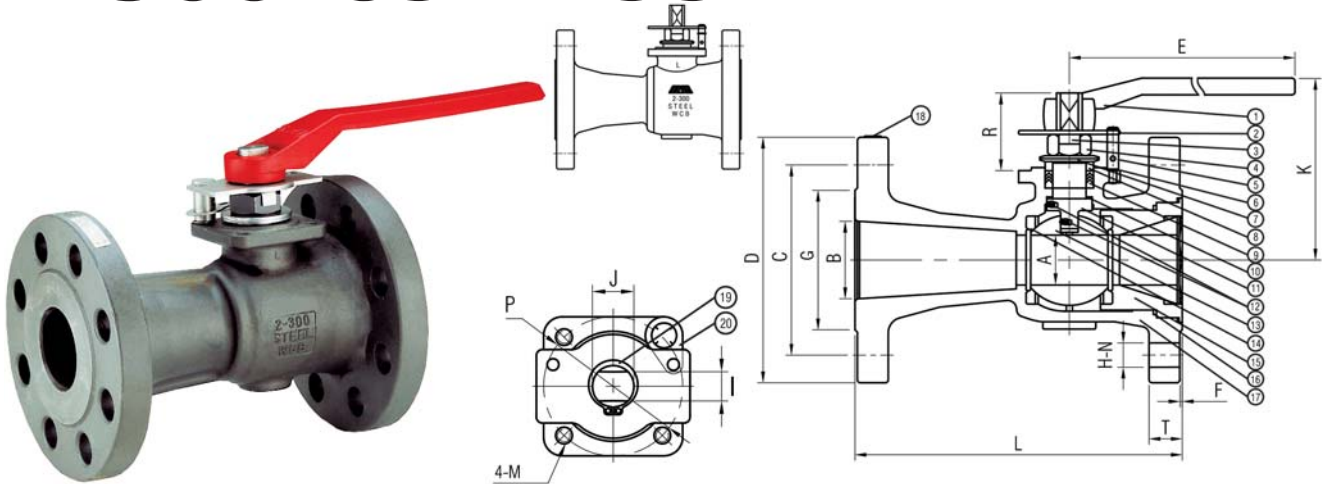

- Reduced port, One piece body
- ANSI B16.34 Class 300
- Blowout-proof stem
- ISO 5211 Mounting pad
- Floating Ball, Anti-static device
- Fire-safe design
- Complies with NACE MR-0103 & Supplier Requirements of NACE MR-0175/ISO 15156

Model F-300-LC-R-SS-N (LCC body) is available

PRESSURE TEMPERATURE RATING

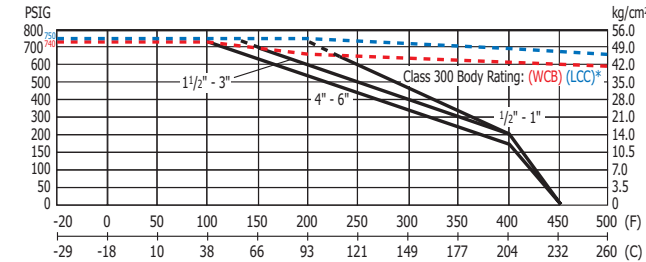

*LCC body rated to -50F/-46C

NAME / MATERIAL					
NO.	PART NAME	MATERIAL	LC	FS*	QTY
1	HANDLE	DUCTILE IRON			1
2	STOPPER PLATE	A276 TYPE 304			1
3	LOCK WASHER	A276 TYPE 304			1
4	GLAND NUT	CARBON STEEL			1
5	STOPPER PIN	A276 TYPE 304			1
6	LOCK WASHER	A276 TYPE 304			1
7	BELLEVILLE WASHER	S.S.301			2
8	GLAND	A276 TYPE 304			1
9	PACKING	PTFE		GRAPHITE	1 SET
10	THRUST WASHER	RPTFE 15% GFT			1
11	STEM	A276 TYPE 316			1
12	ANTI-STATIC DEVICE	A276 TYPE 304			2 SETS
13	BALL	A351 CF8M			1
14	SEAT	PTFE (TFM-1600)			2
15	BODY INSERT	A216 WCB	A352 LCC		1
16	BODY SEAL	PTFE		GRAPHITE	1
17	BODY	A216 WCB	A352 LCC		1
18	IDENTIFICATION PLATE	A276 TYPE 304			1
19	RETAINING RING	CARBON STEEL			1
20	LOCK PLATE	A276 TYPE 304			1

*Fire Safe Certified to API-607

DIMENSIONS																				
SIZE	mm/in A	mm/in B	mm/in C	mm/in D	mm/in E	mm/in F	mm/in G	mm/in H	mm/in I	mm/in J	mm/in K	mm/in L	in M	mm/in N	mm/in P	mm/in R	ISO FLG	CV	WEIGHT KGS/LBS	
2"	38	50	127	165	230	1.6	92	19	14	20	125	216	5/16-UNC	8	70	22.3	49	F07	150	11.19
	1.50	1.97	5.00	6.50	9.06	0.06	3.62	0.75	0.55	0.79	4.92	8.50			2.76	0.88	1.93			24.62
3"	58	76	168	210	400	1.6	127	22	17	25	168	283	3/8-UNC	8	70	28.5	59	F07	350	23.47
	2.28	3.00	6.61	8.27	15.75	0.06	5.00	0.88	0.67	0.98	6.61	11.14			2.76	1.12	2.32			51.63
4"	76	102	200	254	400	1.6	157	22	17	25	183	305	3/8-UNC	8	70	31.8	59	F07	500	35.72
	3.00	4.02	7.87	10.00	15.75	0.06	6.18	0.88	0.67	0.98	7.20	12.00			2.76	1.25	2.32			78.58
6"	114	152	270	318	750	1.6	216	22	23	34	245	403	1/2-UNC	12	125	36.6	73	F12	1200	79.21
	4.49	5.98	10.63	12.52	29.53	0.06	8.50	0.88	0.91	1.34	9.65	15.87			4.92	1.44	2.87			174.26