


F-600-CS-F-SS-N

3.7

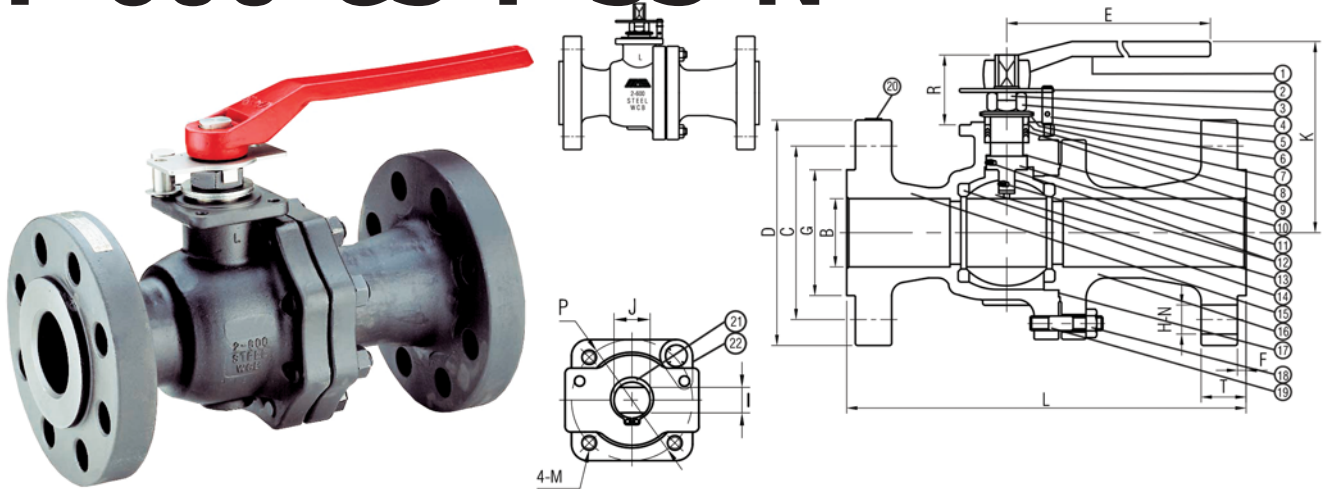


- Full port, Two piece body
- ANSI B16.34 Class 600
- ISO 5211 Mounting pad
- Floating Ball
- Anti-static device
- Fire-safe design
- Blowout-proof stem
- Complies with NACE MR-0103 & Supplier Requirements of NACE MR-0175/ISO 15156

Model F-600-LC-F-SS-N (LCC body) is available

NAME / MATERIAL					
NO.	PART NAME	MATERIAL	LC	FS*	QTY
1	HANDLE	DUCTILE IRON			1
2	STOPPER PLATE	A276 TYPE 304			1
3	LOCK WASHER	A276 TYPE 304			1
4	GLAND NUT	CARBON STEEL			1
5	STOPPER PIN	A276 TYPE 304			1
6	LOCK WASHER	A276 TYPE 304			1
7	BELLEVILLE WASHER	S.S. 301			2
8	GLAND	A276 TYPE 304			1
9	PACKING	PTFE		GRAPHITE	1 SET
10	THRUST WASHER	RPTFE 15% GFT			1
11	STEM	A276 TYPE 316			1
12	ANTI-STATIC DEVICE	A276 TYPE 304			2 SETS
13	BALL	A351 CF8M			1
14	SEAT	PTFE+25%CARBON			2
15	BODY	A216 WCB	A352 LCC		1
16	CAP	A216 WCB	A352 LCC		1
17	BODY SEAL	304+ GRAPHITE			1
18	BOLT NUT	A194 GRADE 2HM	A194 GRADE 7M		1 SET
19	STUD BOLT	A193 GRADE B7M	A320 GRADE L7M		1 SET
20	IDENTIFICATION PLATE	A276 TYPE 304			1
21	RETAINING RING	CARBON STEEL			1
22	LOCK PLATE	A276 TYPE 304			1

*Fire Safe Certified to API-607

PRESSURE TEMPERATURE RATING

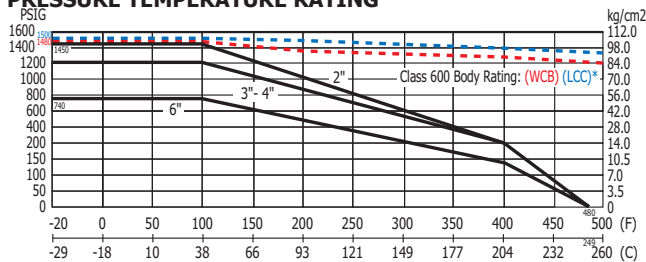

*LCC body rated to -50F/-46C

DIMENSIONS																		
SIZE	mm/in B	mm/in C	mm/in D	mm/in E	mm/in F	mm/in G	mm/in H	mm/in I	mm/in J	mm/in K	mm/in L	in M	mm/in N	mm/in P	mm/in T	mm/in R	ISO FLG	WEIGHT KGS/LBS
2"	50	127	165	230	6.35	92	19	14	20	158	292	5/16-UNC	8	70	31.8	49	F07	17.26
	1.97	5.00	6.50	9.06	0.25	3.62	0.75	0.55	0.79	6.22	11.50			2.76	1.25	1.93		37.97
3"	76	168	210	400	6.35	127	22.3	17	25	194	356	3/8-UNC	8	102	38.1	61	F10	39.25
	3.00	6.61	8.27	15.75	0.25	5.00	0.88	0.67	0.98	7.64	14.02			4.02	1.50	2.40		86.35
4"	100	216	273	460	6.35	157	25.4	23	34	215.5	432	1/2-UNC	8	125	44.5	73	F12	71.74
	3.94	8.50	10.75	18.11	0.25	6.18	1.00	0.91	1.34	8.48	17.00			4.92	1.75	2.87		157.83
6"	150	292	356	1000	6.35	216	28.5	27	40	301.5	559	5/8-UNC	12	140	54.1	90	F14	161.62
	5.91	11.50	14.02	39.37	0.25	8.50	1.12	1.06	1.57	11.87	22.00			5.51	2.13	3.54		355.56