


## F-600-SS-R-N

3.12

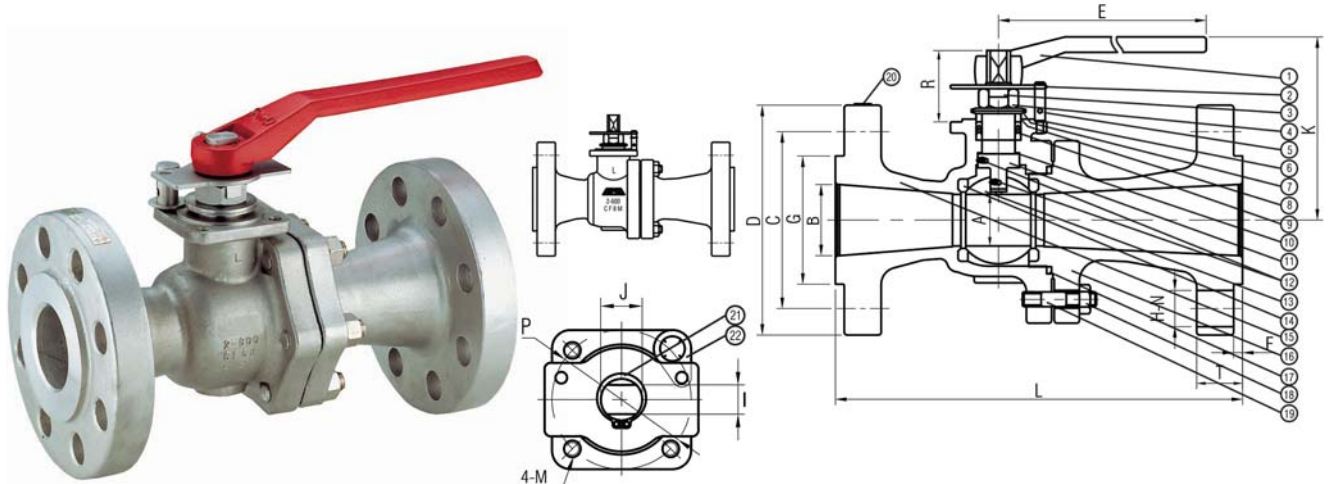


- Reduced port, Two piece body
- ANSI B16.34 Class 600
- ISO 5211 Mounting pad
- Blowout-proof stem
- Anti-static device
- Floating Ball
- Fire-safe design
- Complies with NACE MR-0103 & Supplier Requirements of NACE MR-0175/ISO 15156

NAME / MATERIAL				
NO.	PART NAME	MATERIAL	FS*	QTY
1	HANDLE	DUCTILE IRON		1
2	STOPPER PLATE	A276 TYPE 304		1
3	LOCK WASHER	A276 TYPE 304		1
4	GLAND NUT	A276 TYPE 304		1
5	STOPPER PIN	A276 TYPE 304		1
6	LOCK WASHER	A276 TYPE 304		1
7	BELLEVILLE WASHER	S.S. 301		2
8	GLAND	A276 TYPE 304		1
9	PACKING	PTFE	GRAPHITE	1 SET
10	THRUST WASHER	RPTFE 15% GFT		1
11	STEM	A276 TYPE 316		1
12	ANTI-STATIC DEVICE	A276 TYPE 304		2 SETS
13	BALL	A351 CF8M		1
14	SEAT	PTFE+25% CARBON		2
15	BODY	A351 CF8M		1
16	CAP	A351 CF8M		1
17	BODY SEAL	304+GRAPHITE		1
18	BOLT NUT	A194 GRADE 8MA		1 SET
19	STUD BOLT	A193 GRADE B8M		1 SET
20	IDENTIFICATION PLATE	A276 TYPE 304		1
21	RETAINING RING	CARBON STEEL		1
22	LOCK PLATE	A276 TYPE 304		1

\*Fire Safe Certified to API-607

### PRESSURE TEMPERATURE RATING

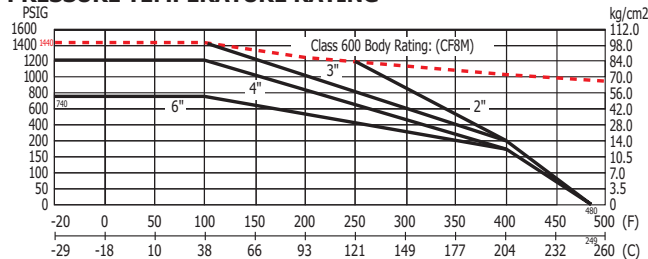

DIMENSIONS																			
SIZE	mm/in A	mm/in B	mm/in C	mm/in D	mm/in E	mm/in F	mm/in G	mm/in H	mm/in I	mm/in J	mm/in K	mm/in L	in M	mm/in N	mm/in P	mm/in T	mm/in R	ISO FLG	WEIGHT KGS/LBS
2"	38	50	127	165	230	6.35	92	19	14	20	144.5	292	5/16-UNC	8	70	31.8	49	F07	15.72
	1.50	1.97	5.00	6.50	9.06	0.25	3.62	0.75	0.55	0.79	5.69	11.50			2.76	1.25	1.93		34.58
3"	58	76	168	210	400	6.35	127	22.3	17	25	180	356	3/8-UNC	8	70	38.1	59	F07	33.05
	2.28	3.00	6.61	8.27	15.75	0.25	5.00	0.88	0.67	0.98	7.09	14.02			2.76	1.50	2.32		72.71
4"	76	102	216	273	400	6.35	157	25.4	17	25	194	432	3/8-UNC	8	70	44.5	59	F07	61.64
	3.00	4.02	8.50	10.75	15.75	0.25	6.18	1.00	0.67	0.98	7.64	17.00			2.76	1.75	2.32		135.61
6"	114	152	292	356	750	6.35	216	28.5	23	34	256	559	1/2-UNC	12	125	54.1	73	F12	131.83
	4.49	5.98	11.50	14.02	29.53	0.25	8.50	1.12	0.91	1.34	10.08	22.00			4.92	2.13	2.87		290.03